
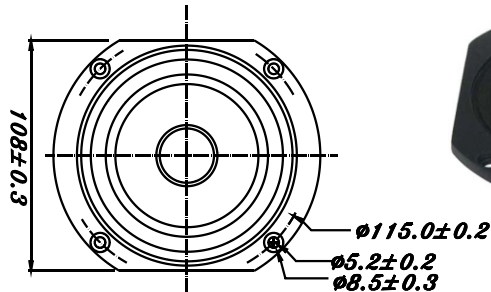



F SERIES

W4-1617

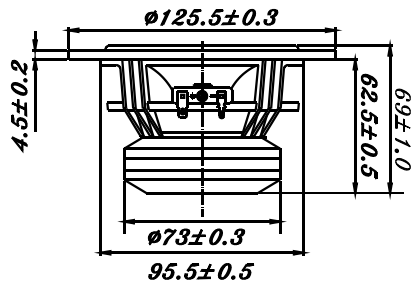

- FULL RANGE DESIGN
- HIGH POWER LOADING
- ALUMINUM DIE CAST BASKET
- SUGARCANE FIBER FILLED PAPER CONE WITH WILD RANGE TEMP ,HIGH LOSS RECIPE OF RUBBER SURROUND
- NON-COMPROMISED UNDERHUNG, NEODYMIUM MOTOR STRUCTURE
- SHORT RING TREATED, LOW 2nd, 3rd DISTORTION

4" PAPER FULL RANGE

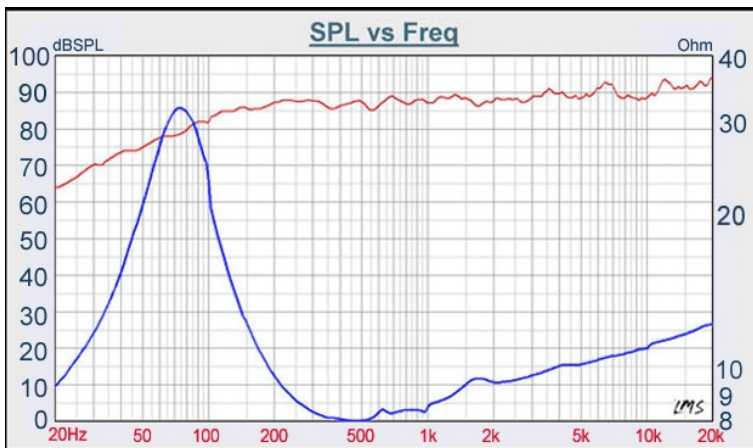

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	75Hz - 20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	4.96 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	3.99g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1058 MN ⁻¹
EFFECTIVE PISTON AREA	0.0057M ²
Levc	0.011 mH
Zo	32 ohm
X-max	3 mm
Vas	4.88 Litr
Qts	0.43
Qms	2.05
Qes	0.54



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com